

UDP3000S系列 可编程线性直流稳压电源



SBN1...Q

1.T-3?

4T-1?

SQ@

PQ010

QANG

Bgegr_j G-M

2,1

RDR

-

AF/-AF08 . |1.T-3?

AF1 . |4T-1? AF2 3T-0? SQ@

AF/-AF0-AF1

151U

QANG

/ . kT-/ k?

SQ@ Fmqr SQ@ Bctjac U?L PQ010 Bgegr_j GM



① 液晶显示交互界面

SBN1...Q


2,1



② 串并联一键设置


SBN1...Q

AF/ AF0

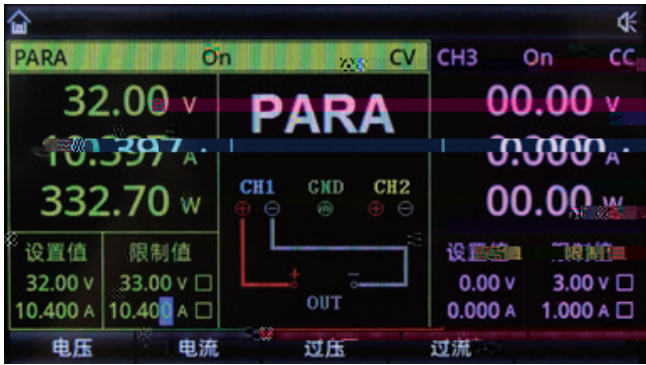


① 输出电压电流波形显示

k

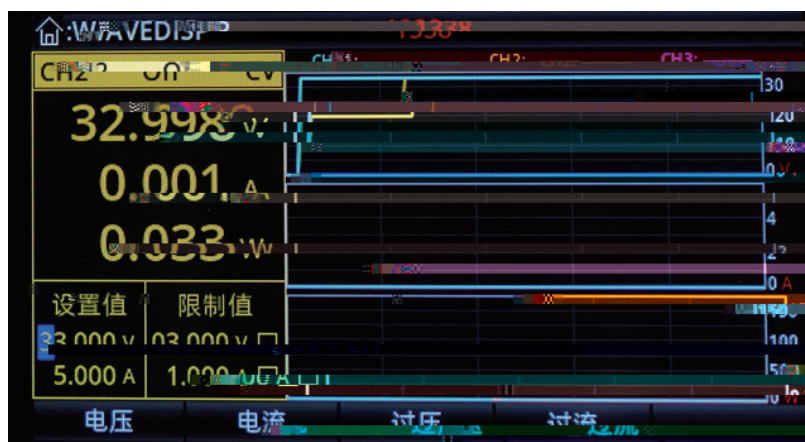

② 丰富的远程控制接口

SBN1...Q PQ010 ! Bgr j G-M ! SQ@
PQ010 SQ@ k



产品技术指标

SDN3303Q+E

AF/\$AF0 . φ 1.TÔ0

AF1 . φ 4T

AF2 3T SQ@

AF/\$AF0 . φ 3?Ô0

AF1 . φ 1? $\hat{O}$ /

AF2 0? SQ@

126U



... / #) 0 k T

kp3.p q 1047 #) 0 k T q

0 K 3. \$ Tp k q-0 k q) 0 K) 0 n k

通道2特征
(SQ_____

3T ® .,03T
0?

接口

SQ@ Fmqr ! SQ@ Bctgac ! J?L GM
/ .
2,1 RDR JAB*UTE?&26. (050'
?A / . .T-/0.T-00.T-01.T® / . # 3.-4.Fx
)
/.,0ie
02. k k Ô/46 k k Ô133k k
/ -