




UT3200+

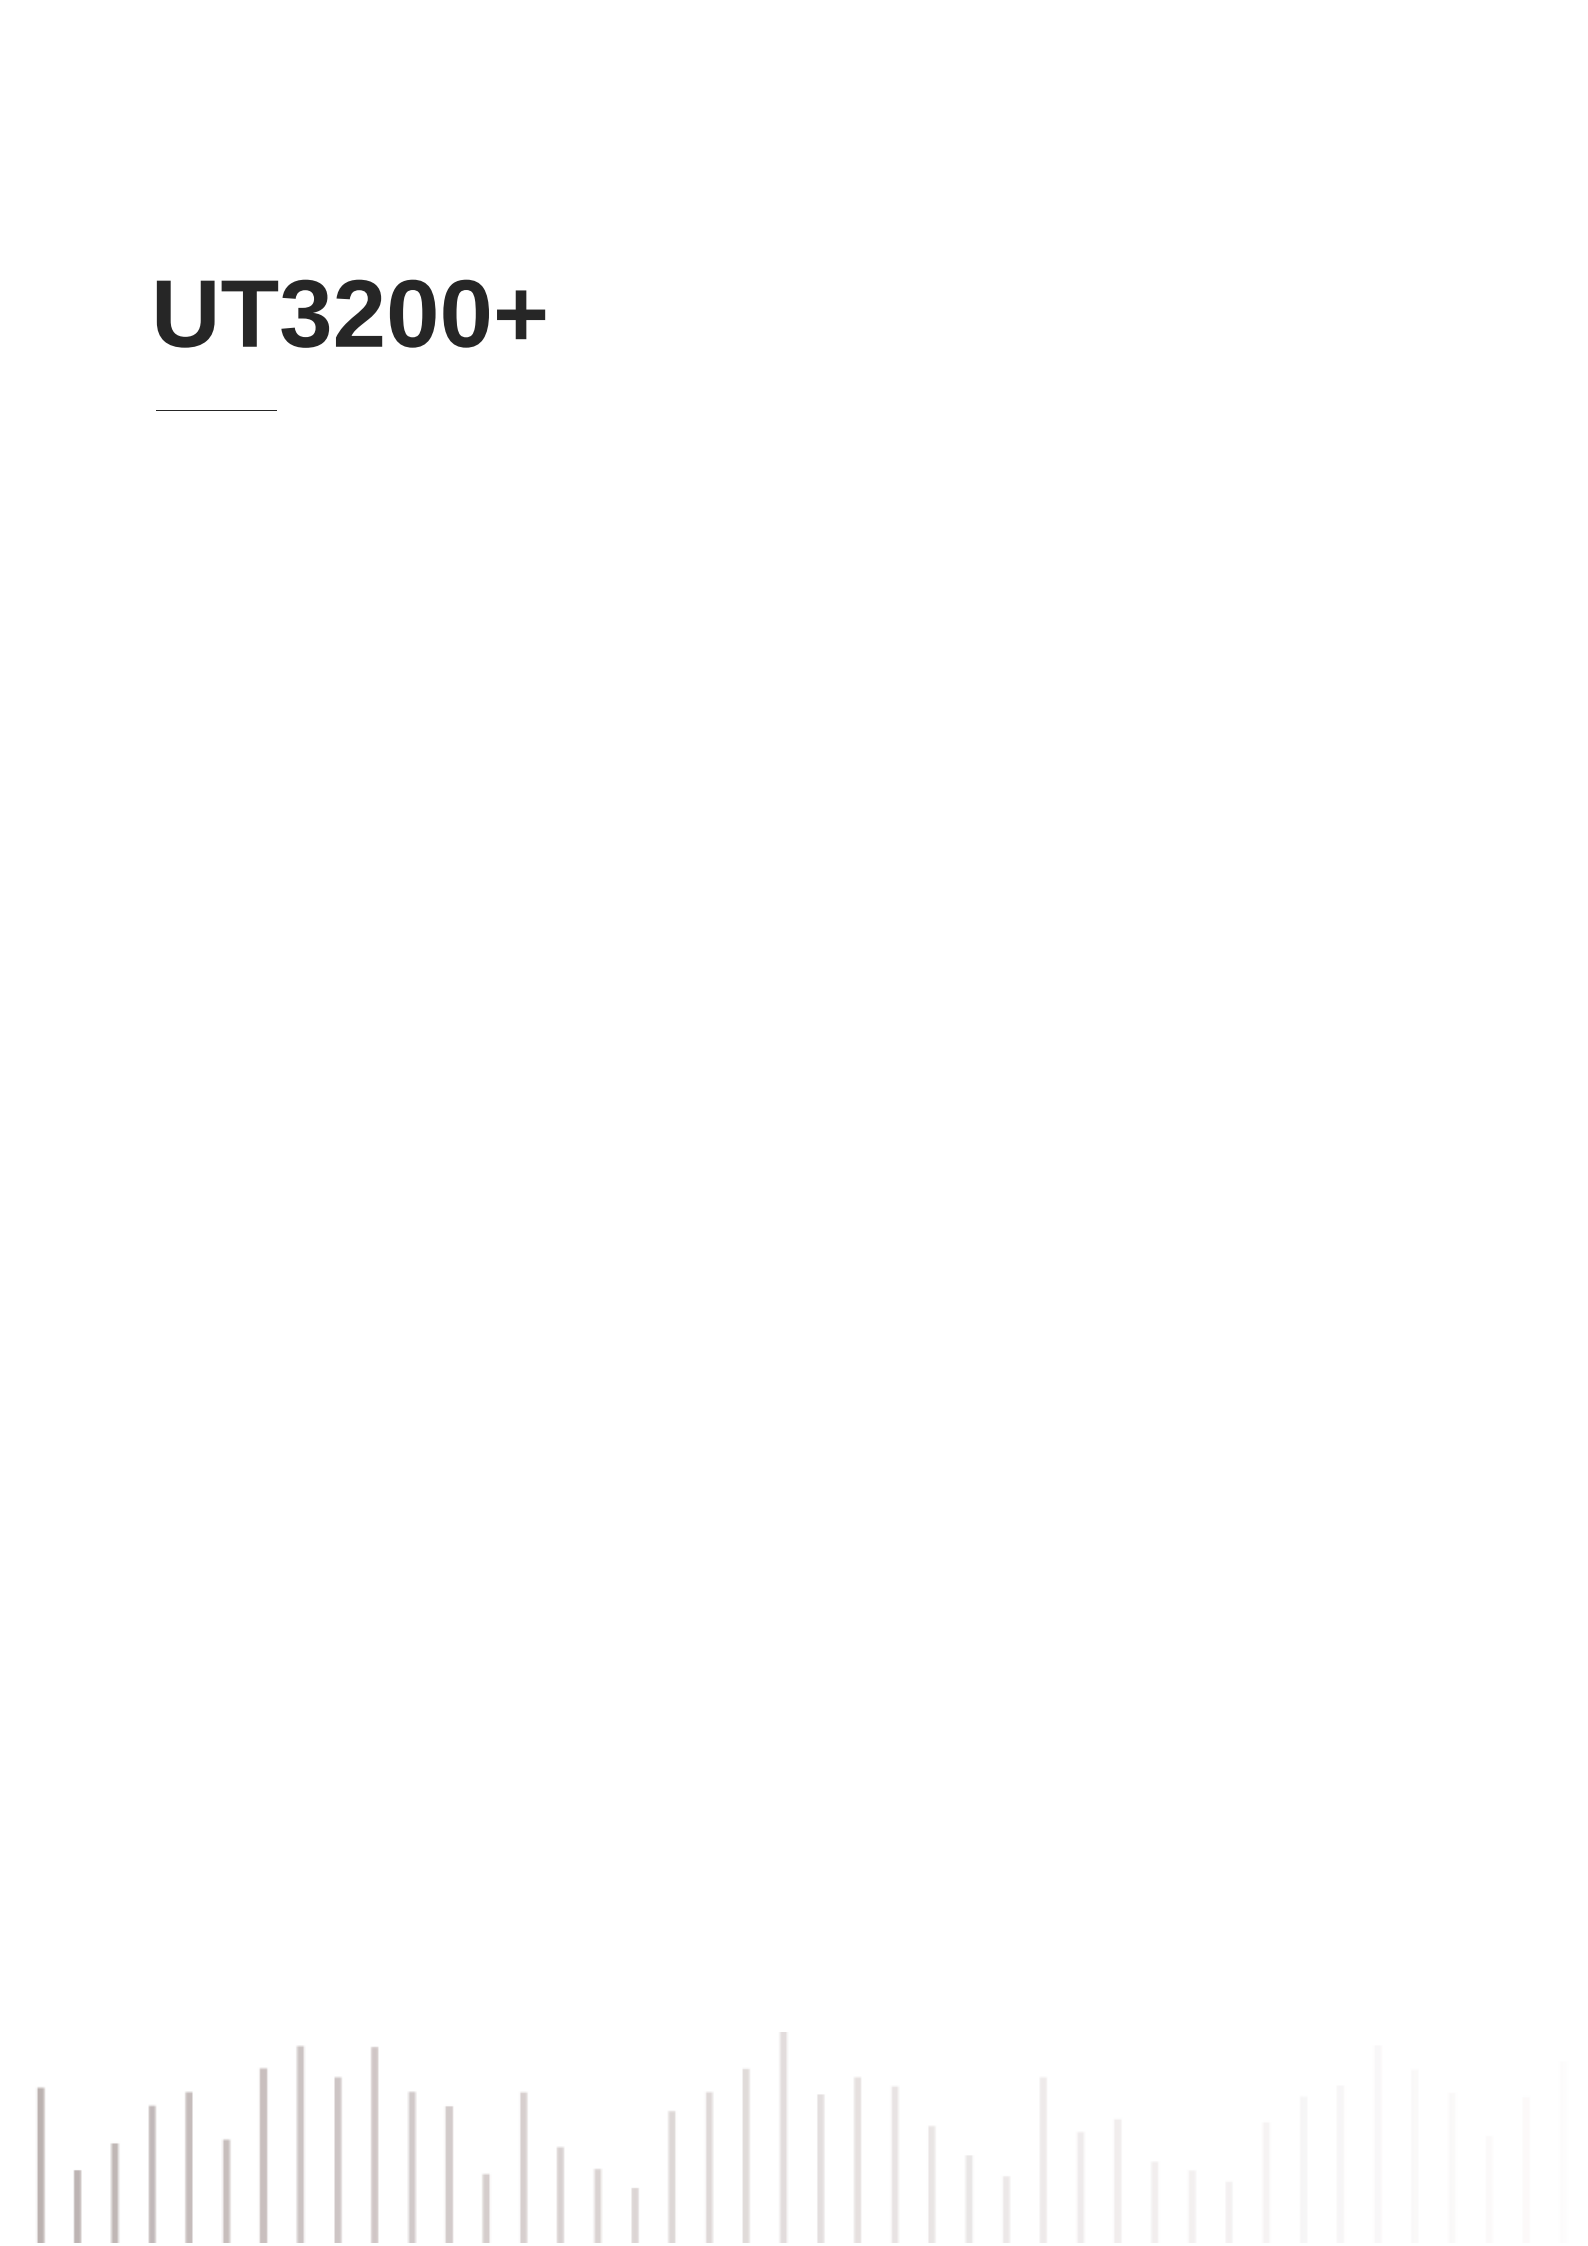

1. 特性与优点


- 4.3 LCD
- K/N/E/J/T/R/S/B
- E -200 J 1800
- 0.01
- E
- E
- W
- 8G U USB HOST U
- ~ 2 -20 J 200
- p
- RS-232C LAN DC 24V
- SCPI MODBUS RTU

2. 产品描述

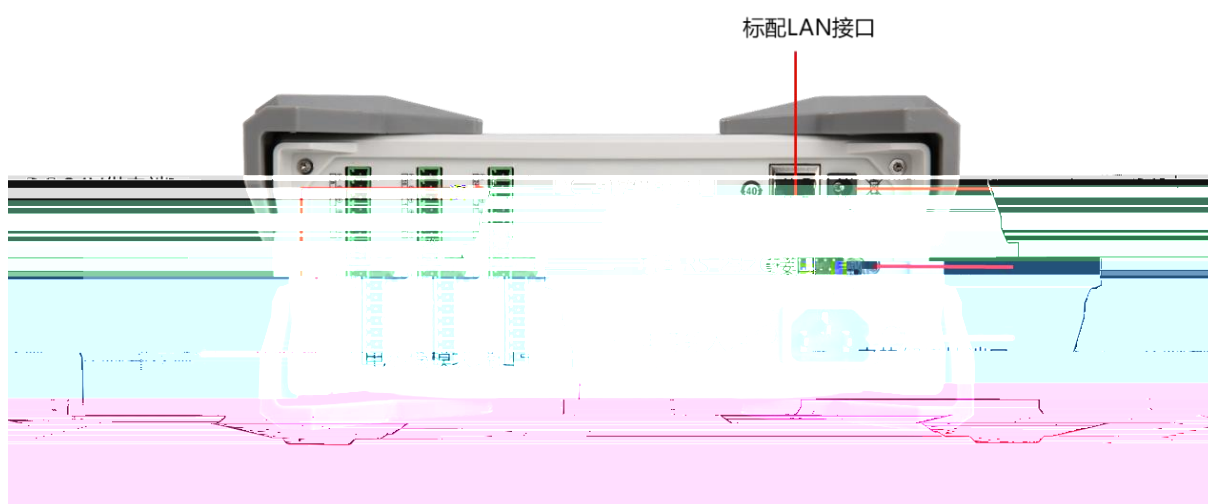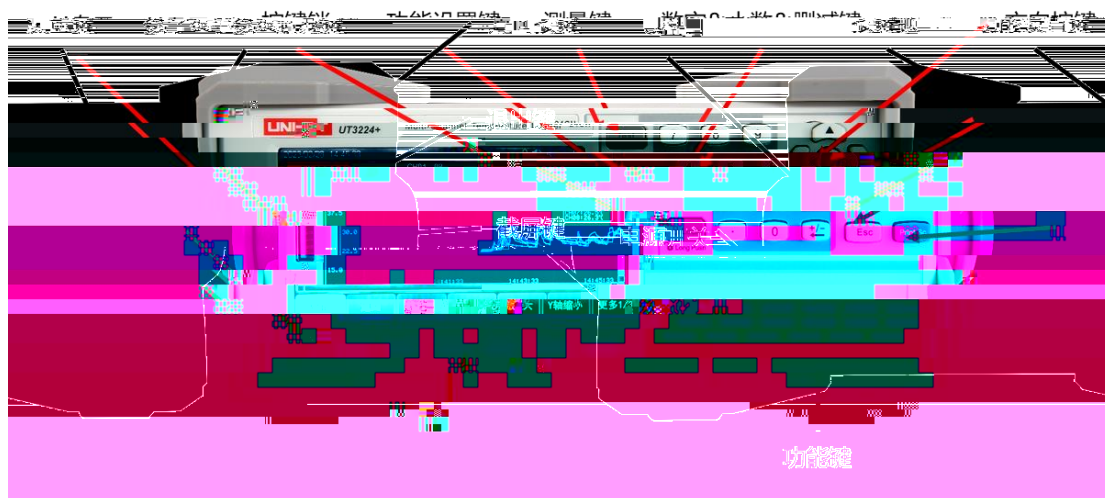

3. 设计亮点

厂 瓦 / 米 / 米 €

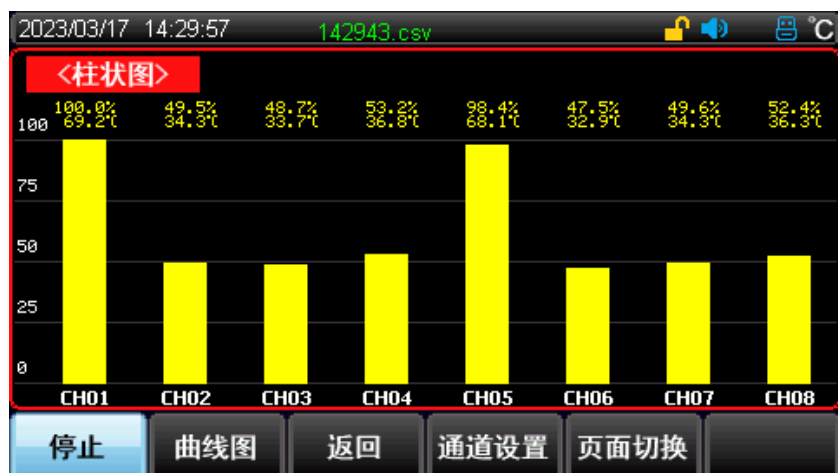

2023/03/30 10:46:37 104633.csv 0.0 KB

<测量>

01K	25.70	05K	24.50
02K	25.38	06K	26.01
03K	26.39	07K	24.74
04K	26.12	08K	26.26

页码 1 总页数 3

停止 曲线图 柱状图 缩放 +/- 通道设置 页面切换

FILE NAME 104633.csv							
TRIGGER T 10:46:33							
NUM CHA 000000							
TC-K							
ate Time	CH1	CH2	CH3	CH4	CH5	CH6	No.
00	200000	1000000	200000	200000	200000	200000	200000
01	200000	1000000	200000	200000	200000	200000	200000
02	200000	1000000	200000	200000	200000	200000	200000
03	200000	1000000	200000	200000	200000	200000	200000
04	200000	1000000	200000	200000	200000	200000	200000
05	200000	1000000	200000	200000	200000	200000	200000
06	200000	1000000	200000	200000	200000	200000	200000
07	200000	1000000	200000	200000	200000	200000	200000
08	200000	1000000	200000	200000	200000	200000	200000
09	200000	1000000	200000	200000	200000	200000	200000
10	200000	1000000	200000	200000	200000	200000	200000
11	200000	1000000	200000	200000	200000	200000	200000
12	200000	1000000	200000	200000	200000	200000	200000
13	200000	1000000	200000	200000	200000	200000	200000

[illegible]

4. 技术参数

5. 附件

o		
---	--	--

A

1[~]

6 联系我们



UNI-T E 400-876-7822

UNI-T 品牌 产品 信息 请 扫描 以下 二维码 或 访问 网站
UNI-T 品牌 产品 信息 请 扫描 以下 二维码 或 访问 网站
<http://www.uni-trend.com>

8 Ω