


UT3200+

UT3200+
UT3232+/UT3240+/UT3248+

6
8 16 24 32 40 48

UT3208+/UT3216+/UT3224+/
4.3

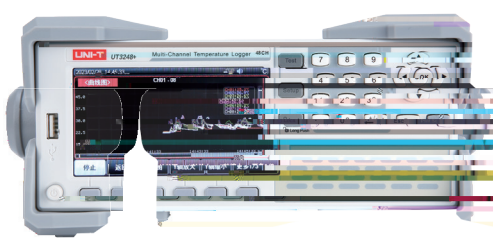

- 4.3
LCD


6

K/N/E/J/T/R/S/B

-200, 1800,

0.01,
- USB Host
8G U
USB U

RS-232C
LAN
SCPI
Moudbus RTU

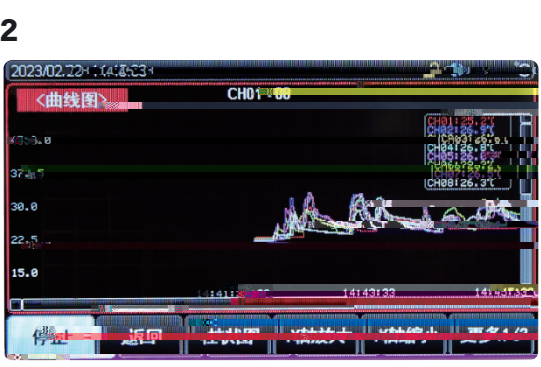

3

UT3208+	UT3216+	UT3224+	UT3232+	UT3240+	UT3248+
8	16	24	32	40	48

4

UT3208+	UT3216+	UT3224+	UT3232+	UT3240+	UT3248+
8	16	24	32	40	48

	UT3208+	UT3216+	UT3224+	UT3232+	UT3240+	UT3248+
T,K,J,N,E,S,R,B	8	16	24	32	40	48

6

	UT3208+	UT3216+	UT3224+	UT3232+	UT3240+	UT3248+
	4.3" TFT LCD					
	500ms 1s					
	-200.0°C~1800.0°C					
	0.01					
	± 0.7°C ()					
	0.5					
	USB U (FAT)					
	RS-232/LAN/ USB Host					
	RS-485					
	SCPI Modbus RTU					
	100VAC 277VAC					
	50Hz/60Hz					
	Lock Print Sc					

T	-150 - 0
	0 - 400
K	-100 - 0
	0 - 1350
J	-100 - 0
	0 - 1200
N	-100 - 0
	0 - 1300
E	-100 - 0
	0 - 850
	0 - 100
S	100 - 300
	300 - 1750
R	0 - 100
	100 - 300
	300 - 1750
	600 - 800
B	800 - 1000
	1000 - 1800



(W × H × D)	340mm × 214mm × 89mm
	3.5kg
	× 1; RS-232 × 1; 8G U × 1 × 1;
K	
	1

