

1 [] []

2 SD SD

1.1

ZC1681B-M

F0

BLADEFIELD

V/M

TF

US

MP3

1.3

1.3.1

20

+

15W

$\geq 300W$

20Hz

20kHz


THD

$\leq 0.5\%$ @ 1k

Ö

2.1.3 LCD $m + g^{\frac{x}{\alpha}} + M \downarrow 2$

2.2

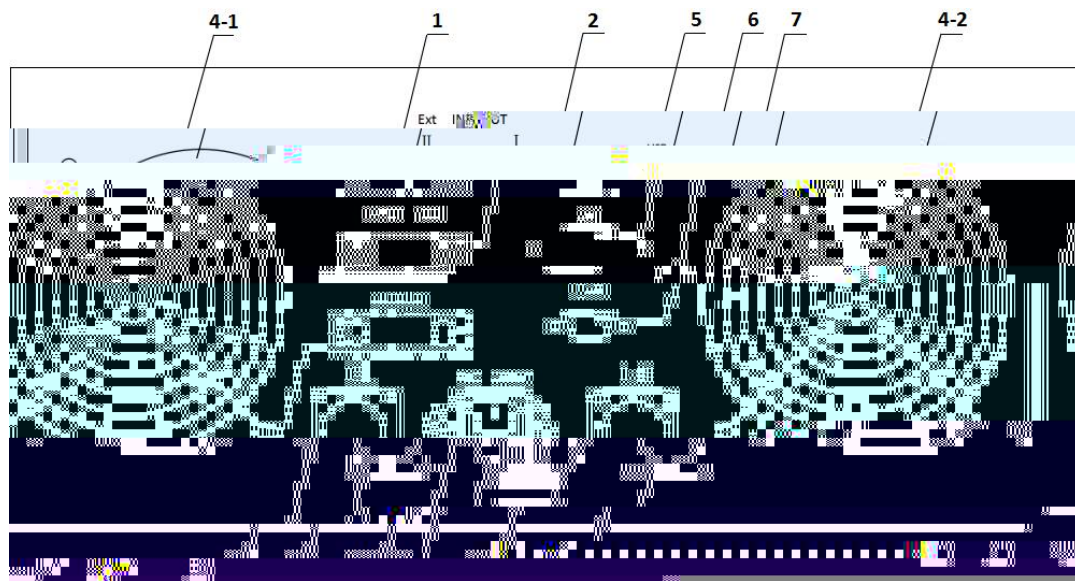

2.2.1

2.2.2

2.2.3

2.2.4

2.2.5 USB

2.2.6

2.2.7 JTAG

2.2.8


2.2.9

2.2.11

2.2.12

2.2.13



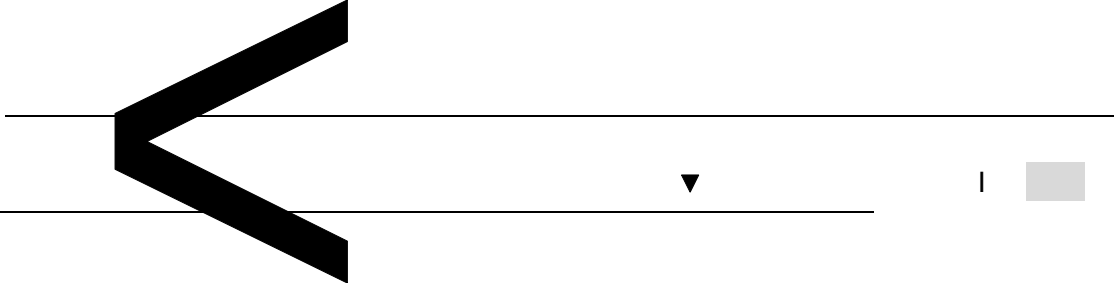

4.1.2

II

4.1.3

1V ± 30%

4.1.4



参数说明									
序号	参数名称	单位	范围	默认值	参数名称	单位	范围	默认值	备注
1	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
2	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
3	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
4	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
5	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
6	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
7	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
8	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
9	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
10	启动时间	ms	0~100	10	启动时间	ms	0~100	10	启动时间
启动时间									

7 2n




4.1.3

3

4.1.5 F0

F0

F0

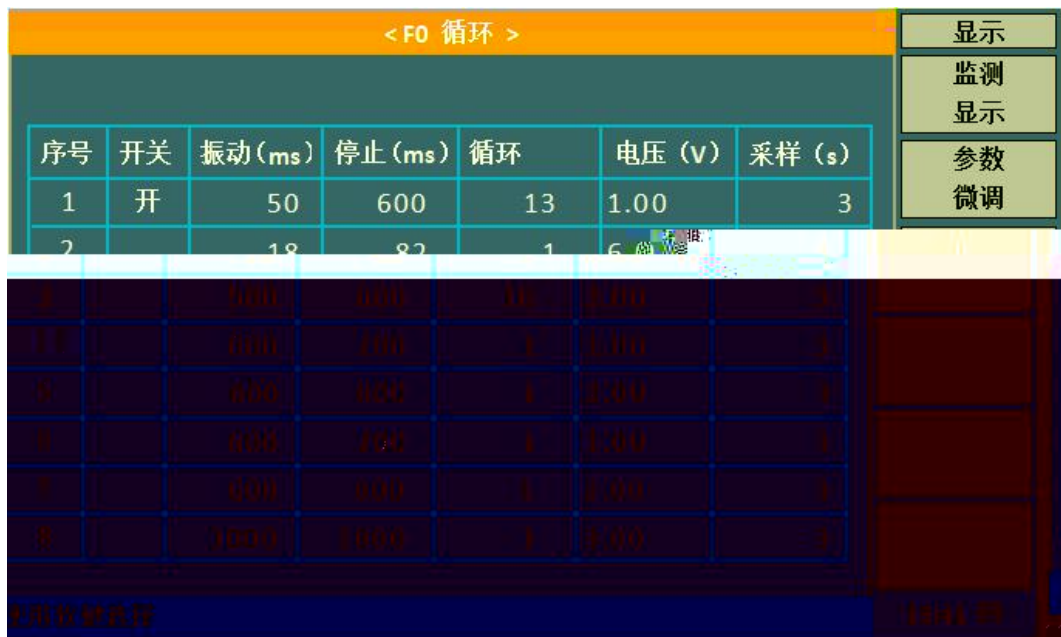

4.1.4 F0

8 F0

1

F0

F0

1→2→3→4→5→6→7→8

2 8

1

0



Backspace

ESC

ms

ENTER

Backspace

Clear

ESC

0


ENTER

Backspace 2

Clear

ESC

ESC

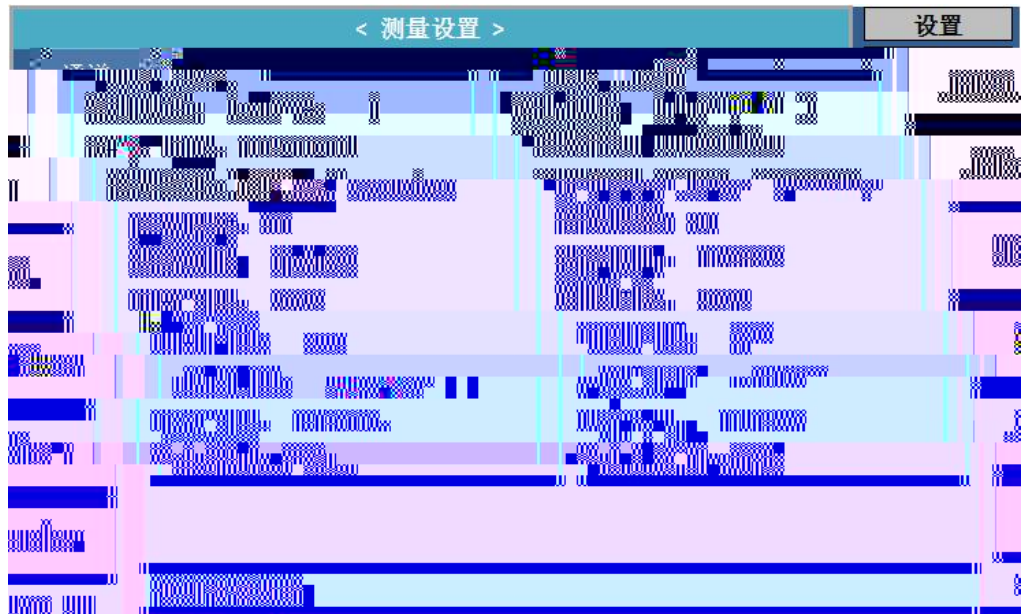


4

↑ +

↓ -

1.0V

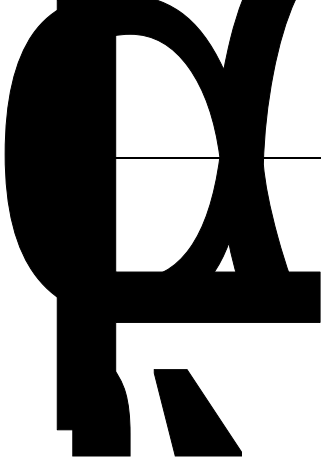

= ×
0.6-1.2v
2.83V 0.6V
2.83V
1V 1V
SD 1V MP3 MP3
1V 0.6V MP3
1V
5
Ω Ω ENTER

6

/

ή

ENTER

ESC


4.2.2



4.2.6

SETUP

I 1 10 1 10
II 11 20 11 20

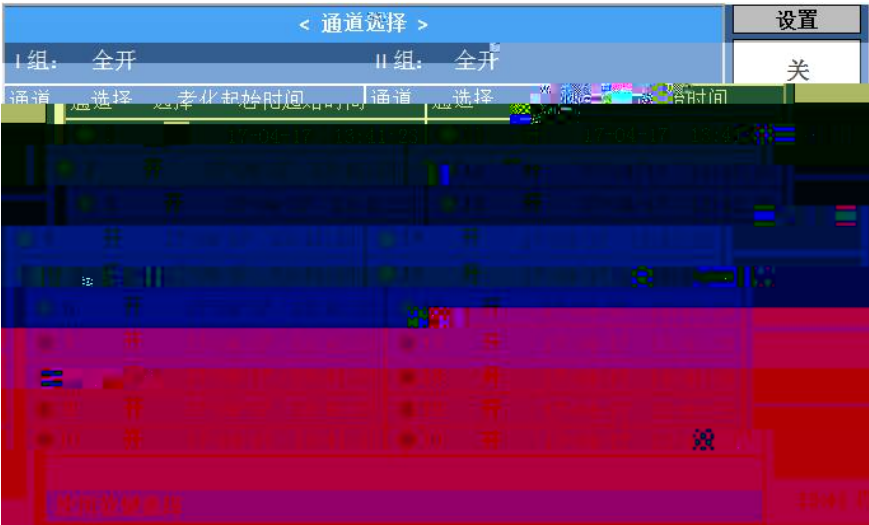

4.2.7

SLIE

4.2.3

SETUP

0 Hz



4.2.9 2

3.1

3.2

ENTER ESC

3.3

ENTER ESC

3.4

ENTER
ESC

4.2.4 SD



4.2.10 1

SETUP



4.2.11 2

銀座

に


↑ +

↓ -

0 154


ENTER

♪

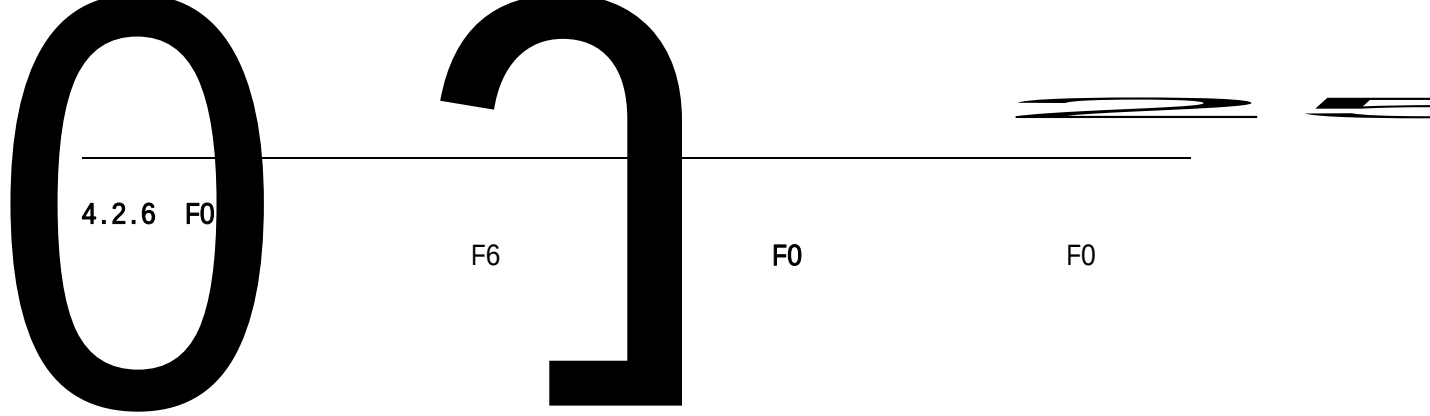

- 1 F0
- 2 F0 100
105.000Hz 205.000Hz
- 3 F0 F0 F0
F0
- 4 F0 F0
- 5 J

4.3

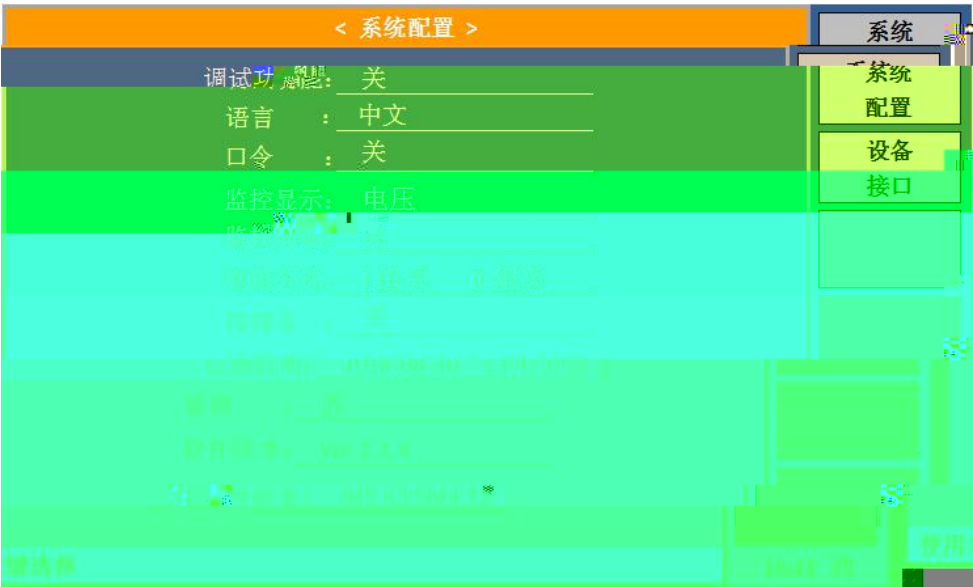

4.3

1

2

English

3

4

5

6

| | |

||

|

||

7

ON OFF


8

ENTER

0 32

ENTER

ESC

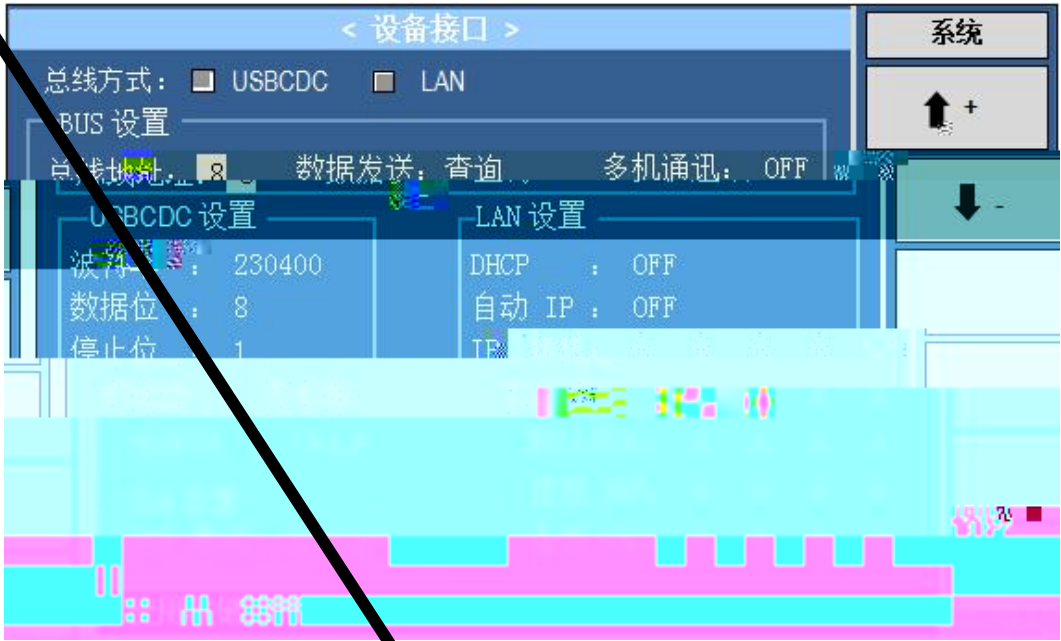

4.4.2

3

DCI`

5.1

“ ”

5.2

5.3

5.4 SD

5.5

DISP

3
6
